

Ultrafiltration

From Wikipedia, the free encyclopedia

Ultrafiltration (UF) is a variety of membrane filtration in which forces like pressure or concentration gradients lead to a separation through a semipermeable membrane. Suspended solids and solutes of high molecular weight are retained in the so-called retentate, while water and low molecular weight solutes pass through the membrane in the permeate (filtrate). This separation process is used in industry and research for purifying and concentrating macromolecular (10^3 - 10^6 Da) solutions, especially protein solutions. Ultrafiltration is not fundamentally different from microfiltration. Both of these separate based on size exclusion or particle capture. It is fundamentally different from membrane gas separation, which separate based on different amounts of absorption and different rates of diffusion. Ultrafiltration membranes are defined by the molecular weight cut-off (MWCO) of the membrane used. Ultrafiltration is applied in cross-flow or dead-end mode.

Contents

- 1 Applications
 - 1.1 Drinking water
 - 1.2 Protein concentration
 - 1.3 Other applications
- 2 Principles
- 3 Membrane fouling
 - 3.1 Concentration polarization
 - 3.2 Types of fouling
 - 3.2.1 Particulate deposition
 - 3.2.2 Scaling
 - 3.2.3 Biofouling
- 4 Membrane arrangements
 - 4.1 Tubular modules
 - 4.2 Hollow fibre
 - 4.3 Spiral-wound modules
 - 4.4 Plate and frame
- 5 Process characteristics
- 6 Process design considerations
 - 6.1 Pre-treatment
 - 6.2 Membrane specifications
 - 6.2.1 Material
 - 6.2.2 Pore size
 - 6.3 Operation strategy
 - 6.3.1 Flowtype
 - 6.3.2 Flow velocity
 - 6.3.3 Flow temperature
 - 6.3.4 Pressure
 - 6.3.5 Multi-stage, multi-module
 - 6.4 Post-treatment

- 6.5 Cleaning
- 7 New developments
- 8 References

Applications

Industries such as chemical and pharmaceutical manufacturing, food and beverage processing, and waste water treatment, employ ultrafiltration in order to recycle flow or add value to later products. Blood dialysis also utilizes ultrafiltration.

Drinking water

UF can be used for the removal of particulates and macromolecules from raw water to produce potable water. It has been used to either replace existing secondary (coagulation, flocculation, sedimentation) and tertiary filtration (sand filtration and chlorination) systems employed in water treatment plants or as standalone systems in isolated regions with growing populations.^[1] When treating water with high suspended solids, UF is often integrated into the process, utilising primary (screening, flotation, filtration) and some secondary treatments as pre-treatment stages.^[2] UF processes are currently preferred over traditional treatment methods for the following reasons:

- No chemicals required (aside from cleaning)
- Constant product quality regardless of feed quality
- Compact plant size
- Capable of exceeding regulatory standards of water quality, achieving 90-100% pathogen removal^[3]



Drinking water treatment 300 m³/h using ultrafiltration in Grundmühle waterworks (Germany)

UF processes are currently limited by the high cost incurred due to membrane fouling and replacement.^[4] Additional pretreatment of feed water is required to prevent excessive damage to the membrane units.

In many cases UF is used for pre filtration in reverse osmosis (RO) plants to protect the RO membranes.

Protein concentration

UF is used extensively in the dairy industry; particularly in the processing of cheese whey to obtain whey protein concentrate (WPC) and lactose-rich permeate.^{[5][6]} In a single stage, a UF process is able to concentrate the whey 10-30 times the feed.^[7]

The original alternative to membrane filtration of whey was using steam heating followed by drum drying or spray drying. The product of these methods had limited applications due to its granulated texture and insolubility. Existing methods also had inconsistent product composition, high capital and operating costs and due to the excessive heat used in drying would often denature some of the proteins.^[5]

Compared to traditional methods, UF processes used for this application:^{[5][7]}

- Are more energy efficient

- Have consistent product quality, 35-80% protein product depending on operating conditions
- Do not denature proteins as they use moderate operating conditions

The potential for fouling is widely discussed, being identified as a significant contributor to decline in productivity.^{[5][6][7]} Cheese whey contains high concentrations of calcium phosphate which can potentially lead to scale deposits on the membrane surface. As a result substantial pretreatment must be implemented to balance pH and temperature of the feed to maintain solubility of calcium salts.^[7]

Other applications

- Filtration of effluent from paper pulp mill
- Cheese manufacture, see ultrafiltered milk
- Removal of pathogens from milk
- Process and waste water treatment
- Enzyme recovery
- Fruit juice concentration and clarification
- Dialysis and other blood treatments
- Desalting and solvent-exchange of proteins (via diafiltration)
- Laboratory grade manufacturing

Principles

The basic operating principle of ultrafiltration uses a pressure induced separation of solutes from a solvent through a semi permeable membrane. The relationship between the applied pressure on the solution to be separated and the flux through the membrane is most commonly described by the Darcy equation:

$$J = \frac{TMP}{\mu R_t}$$

where J is the flux (flow rate per membrane area), TMP is the transmembrane pressure (pressure difference between feed and permeate stream), μ is solvent viscosity, R_t is the total resistance (sum of membrane and fouling resistance).

Membrane fouling

Concentration polarization

When filtration occurs the local concentration of rejected material at the membrane surface increases and can become saturated. In UF, increased ion concentration can develop an osmotic pressure on the feed side of the membrane. This reduces the effective TMP of the system, therefore reducing permeation rate. The increase in concentrated layer at the membrane wall decreases the permeate flux, due to increase in resistance which reduces the driving force for solvent to transport through membrane surface. CP affects almost all the available membrane separation process. In RO, the solutes retained at the membrane layer results in higher osmotic pressure in comparison to the bulk stream concentration. So the higher pressures are required to overcome this osmotic pressure. Concentration polarisation plays a dominant role in ultrafiltration as compared to



A selectively permeable membrane can be mounted in a centrifuge tube. The buffer is forced through the membrane by centrifugation, leaving the protein in the upper chamber.

microfiltration because of the small pore size membrane.^[8] It must be noted that concentration polarization differs from fouling as it has no lasting effects on the membrane itself and can be reversed by relieving the TMP. It does however have a significant effect on many types of fouling.^[9]

Types of fouling

Particulate deposition

The following models describe the mechanisms of particulate deposition on the membrane surface and in the pores:

- *Standard blocking*: macromolecules are uniformly deposited on pore walls
- *Complete blocking*: membrane pore is completely sealed by a macromolecule
- *Cake filtration*: accumulated particles or macromolecules form a fouling layer on the membrane surface, in UF this is also known as a gel layer
- *Intermediate blocking*: when macromolecules deposit into pores or onto already blocked pores, contributing to cake formation ^[10]

Scaling

As a result of concentration polarization at the membrane surface, increased ion concentrations may exceed solubility thresholds and precipitate on the membrane surface. These inorganic salt deposits can block pores causing flux decline, membrane degradation and loss of production. The formation of scale is highly dependent on factors affecting both solubility and concentration polarization including pH, temperature, flow velocity and permeation rate.^[11]

Biofouling

Microorganisms will adhere to the membrane surface forming a gel layer – known as biofilm.^[12] The film increases the resistance to flow, acting as an additional barrier to permeation. In spiral-wound modules, blockages formed by biofilm can lead to uneven flow distribution and thus increase the effects of concentration polarization.^[13]

Membrane arrangements

Depending on the shape and material of the membrane, different modules can be used for ultrafiltration process.^[14] Commercially available designs in ultrafiltration modules vary according to the required hydrodynamic and economic constraints as well as the mechanical stability of the system under particular operating pressures.^[15] The main modules used in industry include:

Tubular modules

The tubular module design uses polymeric membranes cast on the inside of plastic or porous paper components with diameters typically in the range of 5 – 25 mm with lengths from 0.6 - 6.4 m.^[5] Multiple tubes are housed in a PVC or steel shell. The feed of the module is passed through the tubes, accommodating radial transfer of permeate to the shell side. This design allows for easy cleaning however the main drawback is its low

permeability, high volume hold-up within the membrane and low packing density.^{[5][15]}

Hollow fibre


This design is conceptually similar to the tubular module with a shell and tube arrangement. A single module can consist of 50 to thousands of hollow fibres and therefore are self-supporting unlike the tubular design. The diameter of each fibre ranges from 0.2 – 3 mm with the feed flowing in the tube and the product permeate collected radially on the outside. The advantage of having self-supporting membranes as is the ease at which it can be cleaned due to its ability to be backflushed. Replacement costs however are high, as one faulty fibre will require the whole bundle to be replaced. Considering the tubes are of small diameter, using this design also makes the system prone to blockage.^[7]



Hollow fibre module

Spiral-wound modules

Are composed of a combination of flat membrane sheets separated by a thin meshed spacer material which serves as a porous plastic screen support. These sheets are rolled around a central perforated tube and fitted into a tubular steel pressure vessel casing. The feed solution passes over the membrane surface and the permeate spirals into the central collection tube. Spiral-wound modules are a compact and cheap alternative in ultrafiltration design, offer a high volumetric throughput and can also be easily cleaned.^[15] However it is limited by the thin channels where feed solutions with suspended solids can result in partial blockage of the membrane pores.^[7]

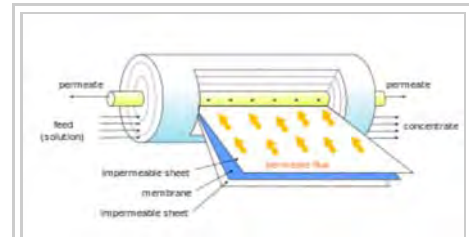

Spiral-wound membrane module

Plate and frame

This uses a membrane placed on a flat plate separated by a mesh like material. The feed is passed through the system from which permeate is separated and collected from the edge of the plate. Channel length can range from 10 – 60 cm and channel heights from 0.5 – 1 mm.^[7] This module provides low volume hold-up, relatively easy replacement of the membrane and the ability to feed viscous solutions because of the low channel height, unique to this particular design.^[15]

Process characteristics

The process characteristics of a UF system are highly dependent on the type of membrane used and its application. Manufacturers' specifications of the membrane tend to limit the process to the following typical specifications:^{[16][17][18][19]}

	Hollow Fibre	Spiral-wound	Ceramic Tubular	Plate and Frame
pH	2-13	2-11	3-7	
Feed Pressure (psi)	9-15	<30-120	60-100	
Backwash Pressure (psi)	9-15	20-40	10-30	
Temperature (°C)	5-30	5-45	5-400	
Total Dissolved Solids (mg/L)	<1000	<600	<500	
Total Suspended Solids (mg/L)	<500	<450	<300	
Turbidity (NTU)	<15	<1	<10	
Iron (mg/L)	<5	<5	<5	
Oils and Greases (mg/L)	<0.1	<0.1	<0.1	
Solvents, phenols (mg/L)	<0.1	<0.1	<0.1	

Process design considerations

When designing a new membrane separation facility or considering its integration into an existing plant, there are many factors which must be considered. For most applications a heuristic approach can be applied to determine many of these characteristics to simplify the design process. Some design areas include:

Pre-treatment

Treatment of feed prior to the membrane is essential to prevent damage to the membrane and minimize the effects of fouling which greatly reduce the efficiency of the separation. Types of pre-treatment are often dependent on the type of feed and its quality. For example in wastewater treatment, household waste and other particulates are screened. Other types of pre-treatment common to many UF processes include pH balancing and coagulation.^{[20][21]} Appropriate sequencing of each pre-treatment phase is crucial in preventing damage to subsequent stages. Pre-treatment can even be employed simply using dosing points.

Membrane specifications

Material

Most UF membranes use polymer materials (polysulfone, polypropylene, cellulose acetate, polylactic acid) however ceramic membranes are used for high temperature applications.

Pore size

A general rule for choice of pore size in a UF system is to use a membrane with a pore size one tenth that of the particle size to be separated. This limits the number of smaller particles entering the pores and adsorbing to the pore surface. Instead they block the entrance to the pores allowing simple adjustments of cross-flow velocity to dislodge them.^[7]

Operation strategy

Flowtype

UF systems can either operate with cross-flow or dead-end flow. In dead-end filtration the flow of the feed solution is perpendicular to the membrane surface. On the other hand in cross flow systems the flow passes parallel to the membrane surface.^[22] Dead-end configurations are more suited to batch processes with low suspended solids as solids accumulate at the membrane surface therefore requiring frequent backflashes and cleaning to maintain high flux. Cross-flow configurations are preferred in continuous operations as solids are continuously flushed from the membrane surface resulting in a thinner cake layer and lower resistance to permeation.

Flow velocity

Flow velocity is especially critical for hard water or liquids containing suspensions in preventing excessive fouling. Higher cross-flow velocities can be used to enhance the sweeping effect across the membrane surface therefore preventing deposition of macromolecules and colloidal material and reducing the effects of concentration polarization. Expensive pumps are however required to achieve these conditions.

Flow temperature

To avoid excessive damage to the membrane, it is recommended to operate a plant at the temperature specified by the membrane manufacturer. In some instances however temperatures beyond the recommended region are required to minimise the effects of fouling.^[21] Economic analysis of the process is required to find a compromise between the increased cost of membrane replacement and productivity of the separation.




Pressure

Pressure drops over multi-stage separation can result in a drastic decline in flux performance in the latter stages of the process. This can be improved using booster pumps to increase the TMP in the final stages. This will incur a greater capital and energy cost which will be offset by the improved productivity of the process.^[21] With a multi-stage operation, retentate streams from each stage are recycled through the previous stage to improve their separation efficiency.

Multi-stage, multi-module

Multiple stages in series can be applied to achieve higher purity permeate streams. Due to the modular nature of membrane processes, multiple modules can be arranged in parallel to treat greater volumes.^[23]

Post-treatment

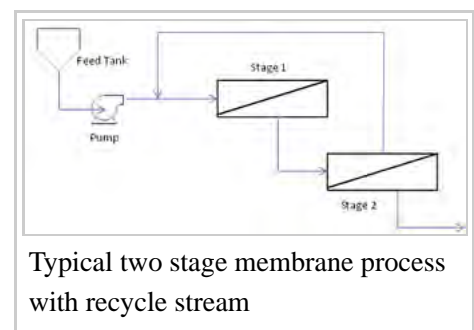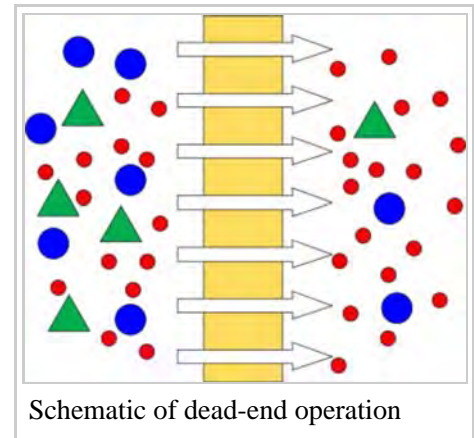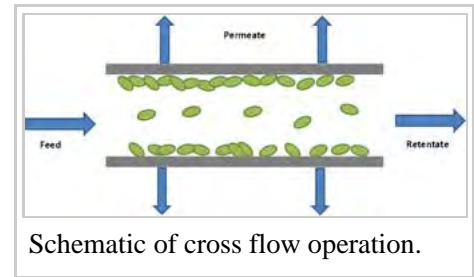

Post-treatment of the product streams is dependent on the composition of the permeate and retentate and its end-use or government regulation. In cases such as milk separation both streams (milk and whey) can be collected and made into useful products. Additional drying of the retentate will produce whey powder. In the paper mill industry, the retentate (non-biodegradable organic material) is incinerated to recover energy and permeate (purified water) is discharged into waterways. It is essential for the permeate water to be pH balanced and cooled to avoid thermal pollution of waterways and altering its pH.

Cleaning

Cleaning of the membrane is done regularly to prevent the accumulation of foulants and reverse the degrading effects of fouling on permeability and selectivity.

Regular backwashing is often conducted every 10 min for some processes to remove cake layers formed on the membrane surface.^[7] By pressurising the permeate stream and forcing it back through the membrane, accumulated particles can be dislodged, improving the flux of the process. Backwashing is limited in its ability to remove more complex forms of fouling such as biofouling, scaling or adsorption to pore walls.^[24] These types of foulants require chemical cleaning to be removed. The common types of chemicals used for cleaning are:^{[24][25]}

- Acidic solutions for the control of inorganic scale deposits
- Alkali solutions for removal of organic compounds
- Biocides or disinfection such as Chlorine or peroxide when bio-fouling is evident

When designing a cleaning protocol it is essential to consider:

Cleaning time – Adequate time must be allowed for chemicals to interact with foulants and permeate into the membrane pores. However if the process is extended beyond its optimum duration it can lead to denaturation of the membrane and deposition of removed foulants.^[24] The complete cleaning cycle including rinses between stages may take as long as 2 hours to complete.^[26]

Aggressiveness of chemical treatment – With a high degree of fouling it may be necessary to employ aggressive cleaning solutions to remove fouling material. However in some applications this may not be suitable if the membrane material is sensitive, leading to enhanced membrane ageing.

Disposal of cleaning effluent – The release of some chemicals into wastewater systems may be prohibited or regulated therefore this must be considered. For example the use of phosphoric acid may result in high levels of phosphates entering water ways and must be monitored and controlled to prevent eutrophication.

Summary of common types of fouling and their respective chemical treatments ^[7]

Foulant	Reagent	Time and Temperature	Mode of Action
Fats and oils, proteins, polysaccharides, bacteria	0.5M NaOH with 200 ppm Cl ₂	30-60 min 25-55 °C	Hydrolysis and oxidation
DNA, mineral salts	0.1M – 0.5M acid (acetic, citric, nitric)	30-60 min 25-35 °C	Solubilization
Fats, oils, biopolymers, proteins	0.1% SDS, 0.1% Triton X-100	30 min – overnight 25-55 °C	Wetting, emulsifying, suspending, dispersing
Cell fragments, fats, oils, proteins	Enzyme detergents	30 min – overnight 30 – 40 °C	Catalytic breakdown
DNA	0.5% DNAase	30 min – overnight 20 – 40 °C	Enzyme hydrolysis

New developments

In order to increase the life-cycle of membrane filtration systems, energy efficient membranes are being developed in membrane bioreactor systems. Technology has been introduced which allows the power required to aerate the membrane for cleaning to be reduced whilst still maintaining a high flux level. Mechanical cleaning processes have also been adopted using granulates as an alternative to conventional forms of cleaning; this reduces energy consumption and also reduces the area required for filtration tanks.^[27]

Membrane properties have also been enhanced to reduce fouling tendencies by modifying surface properties. This can be noted in the biotechnology industry where membrane surfaces have been altered in order to reduce the amount of protein binding.^[28] Ultrafiltration modules have also been improved to allow for more membrane for a given area without increasing its risk of fouling by designing more efficient module internals.

The current pre-treatment of seawater desulphonation uses ultrafiltration modules that have been designed to withstand high temperatures and pressures whilst occupying a smaller footprint. Each module vessel is self supported and resistant to corrosion and accommodates easy removal and replacement of the module without the cost of replacing the vessel itself.^[27]

References

- Clever, M.; Jordt, F.; Knauf, R.; Rübiger, N.; Rüdibusch, M.; Hilker-Scheibel, R. (1 December 2000). "Process water production from river water by ultrafiltration and reverse osmosis". *Desalination*. **131** (1-3): 325–336. doi:10.1016/S0011-9164(00)90031-6.
- Lainé, J.-M.; Vial, D.; Moulart, Pierre (1 December 2000). "Status after 10 years of operation — overview of UF technology today". *Desalination*. **131** (1-3): 17–25. doi:10.1016/S0011-9164(00)90002-X.
- Water treatment membrane processes*. New York [u.a.]: McGraw Hill. 1996. ISBN 9780070015593. |first1= missing |last1= in Authors list (help)
- Edwards, David; Donn, Alasdair; Meadowcroft, Charlotte (1 May 2001). "Membrane solution to a "significant risk" Cryptosporidium groundwater source". *Desalination*. **137** (1-3): 193–198. doi:10.1016/S0011-9164(01)00218-1.
- Tamime, A. Y. *Membrane Processing Dairy and Beverage Applications*. Chichester: Wiley. ISBN 1118457021.
- Nigam, Mayank Omprakash; Bansal, Bipan; Chen, Xiao Dong (1 January 2008). "Fouling and cleaning of whey protein concentrate fouled ultrafiltration membranes". *Desalination*. **218** (1-3): 313–322.

doi:10.1016/j.desal.2007.02.027.

7. Cheryan, Munir (1998). *Ultrafiltration and Microfiltration Handbook*. CRC Press. ISBN 1420069020.
8. Brian, P.L., 1965, Concentration polarization in reverse osmosis desalination with variable flux and incomplete salt rejection, *Ind. Eng. Chem. Fund.* 4: 439–445.
9. Rizvi, edited by Anil Kumar Pabby, Ana Maria Sastre, Syed S.H.; Pabby, Anil Kumar; Rizvi., Syed S.H.; Sastre, Ana Maria (2007). *Handbook of membrane separations : chemical, pharmaceutical, and biotechnological applications*. Boca Raton, Fla.: CRC Press. ISBN 978-0-8493-9549-9. Cite uses deprecated parameter |coauthors= (help)
10. Bruijn, J P F; Salazar, F N; Borquez, R (September 2005). "Membrane blocking in ultrafiltration: A new approach to fouling". *Food and Bioprocesses Processing*. **83** (3): 211–219.
11. Antony, Alice; Low, Jor How; Gray, Stephen; Childress, Amy E.; Le-Clech, Pierre; Leslie, Greg (1 November 2011). "Scale formation and control in high pressure membrane water treatment systems: A review". *Journal of Membrane Science*. **383** (1-2): 1–16. doi:10.1016/j.memsci.2011.08.054.
12. Flemming, H.-C.; Schaule, G.; Griebe, T.; Schmitt, J.; Tamachkiorowa, A. (1 November 1997). "Biofouling—the Achilles heel of membrane processes". *Desalination*. **113** (2-3): 215–225. doi:10.1016/S0011-9164(97)00132-X.
13. Baker, J.S.; Dudley, L.Y. (1 September 1998). "Biofouling in membrane systems — A review". *Desalination*. **118** (1-3): 81–89. doi:10.1016/S0011-9164(98)00091-5.
14. Futselaar, Harry; Weijenberg, Dick C. (1 September 1998). "System design for large-scale ultrafiltration applications". *Desalination*. **119** (1-3): 217–224. doi:10.1016/S0011-9164(98)00159-3.
15. Belfort, Georges (1 February 1988). "Membrane modules: comparison of different configurations using fluid mechanics". *Journal of Membrane Science*. **35** (3): 245–270. doi:10.1016/S0376-7388(00)80299-9.
16. "Membrane Products". Koch Membrane Systems. Retrieved 9 October 2013. |first1= missing |last1= in Authors list (help)
17. "Water Treatment Primer for Communities in Need" (PDF). US Department of the Interior Bureau of Reclamation. Retrieved 11 October 2013. |first1= missing |last1= in Authors list (help)
18. "Operation and Maintenance Manual - UF-6-HF Ultrafiltration System" (PDF). Con-Serv Manufacturing. Retrieved 10 October 2013. |first1= missing |last1= in Authors list (help)
19. Laine, prepared by Joseph G. Jacangelo, Samer Adham, Jean-Michel (1997). *Membrane filtration for microbial removal*. Denver, CO: AWWA Research Foundation and American Water Works Association. ISBN 0898678943.
20. "Rosehill Recycled Water Scheme - Fairfield Recycled Water Plant" (PDF). Sydney Water. |first1= missing |last1= in Authors list (help)
21. Nordin, Anna-Karin; Jönsson, Ann-Sofi (1 November 2006). "Case study of an ultrafiltration plant treating bleach plant effluent from a pulp and paper mill". *Desalination*. **201** (1-3): 277–289. doi:10.1016/j.desal.2006.06.004.
22. Farahbakhsh, Khosrow; Adham, Samer S.; Smith, Daniel W. (June 2003). "Monitoring the Integrity of Low-Pressure Membranes". *Journal AWWA*: 95–107.
23. *Water treatment membrane processes*. New York [u.a.]: McGraw Hill. 1996. ISBN 0070015597. |first1= missing |last1= in Authors list (help)
24. Cui, edited by Z.F.; Muralidhara, H.S. (2010). *Membrane technology : a practical guide to membrane technology and applications in food and bioprocessing* (1st ed.). Amsterdam: Butterworth-Heinemann. pp. 213*254. ISBN 978-1-85617-632-3.
25. Gao, Wei; Liang, Heng; Ma, Jun; Han, Mei; Chen, Zhong-lin; Han, Zheng-shuang; Li, Gui-bai (1 May 2011). "Membrane fouling control in ultrafiltration technology for drinking water production: A review". *Desalination*. **272** (1-3): 1–8. doi:10.1016/j.desal.2011.01.051.
26. Wallberg, Ola; Jönsson, Ann-Sofi; Wickström, Peter (1 December 2001). "Membrane cleaning — a case study in a sulphite pulp mill bleach plant". *Desalination*. **141** (3): 259–268. doi:10.1016/S0011-9164(01)85004-9.
27. Bennett, Anthony (1 November 2012). "Membrane technology: Developments in ultrafiltration technologies". *Filtration + Separation*. **49** (6): 28–33. doi:10.1016/S0015-1882(12)70287-2.
28. Ag, S (1 September 2012). "Energy-efficient membrane is designed for MBR systems". *Membrane Technology*. **2012** (9): 4. doi:10.1016/S0958-2118(12)70178-7.

Retrieved from "https://en.wikipedia.org/w/index.php?title=Ultrafiltration&oldid=753861858"

Categories: Filtration | Water treatment | Membrane technology

- This page was last modified on 9 December 2016, at 16:39.
- Text is available under the Creative Commons Attribution-ShareAlike License; additional terms may apply. By using this site, you agree to the Terms of Use and Privacy Policy. Wikipedia® is a registered trademark of the Wikimedia Foundation, Inc., a non-profit organization.