



# FILMTEC Membranes

## FILMTEC Home Drinking Water RO Elements


FILMTEC™ reverse osmosis membrane elements for home drinking water are the industry’s most reliable. Advanced membrane technology and automated fabrication allow these elements to deliver consistent performance that equipment suppliers, water treatment dealers and residential customers can rely on. FILMTEC elements are shipped dry for convenient handling and long shelf-life. These elements are NSF/ANSI Standard 58 listed. Equipment suppliers can take advantage of FilmTec’s Standard 58 listing and participation in the NSF Data Transfer Protocol to reduce costs for reduction claims for their systems.

FILMTEC home drinking water elements are rated at 50 psi and will purify about 20% more water than competitive elements rated at 60 psi (please see reference charts on back for more information).

### Product Specifications

Product	Part Number	Applied Pressure psig (bar)	Permeate Flow Rate, gpd (l/h)	Stabilized Salt Rejection (%)
<b>TW30-1812-24</b>	93430	50 (3.4)	24 (3.8)	98
<b>TW30-1812-36</b>	80719	50 (3.4)	36 (5.7)	98
<b>TW30-1812-50</b>	80722	50 (3.4)	50 (7.9)	98
<b>TW30-1812-75</b>	114731	50 (3.4)	75 (12)	98

1. Permeate flow and salt rejection based on the following test conditions: 250 ppm softened tapwater, 77°F (25°C), 15% recovery and the specified applied pressure.
2. Minimum salt rejection is 96.0%.
3. Permeate flows for individual elements may vary +/-20%.

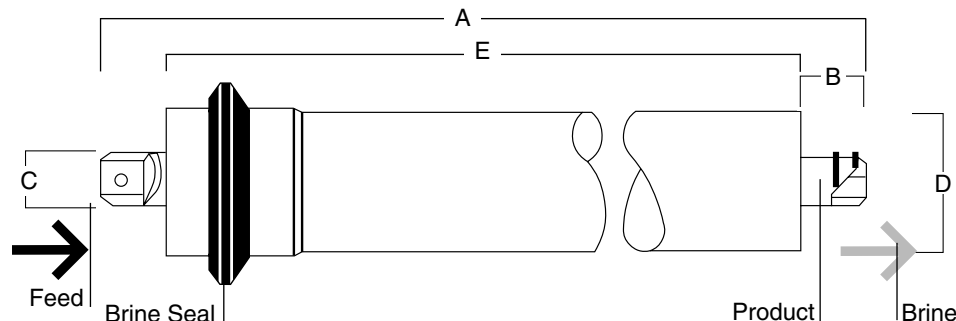

Product	Dimensions – Inches (mm)				
	A	B	C	D	E
<b>TW30-1812</b>	11.74 (298)	0.87 (22)	0.68 (17)	1.75 (44.5)	10.0 (254)

4. TW30-1812 Home Drinking Water Elements fit nominal 2-inch I.D. pressure vessel.

1 inch = 25.4 mm

### Operating Limits

Membrane Type .....Polyamide Thin-Film Composite  
 Maximum Operating Temperature .....113°F (45°C)  
 Maximum Operating Pressure .....300 psig (21 bar)  
 Maximum Feed Flow Rate .....2.0 gpm (7.6 lpm)  
 pH Range, Continuous Operation<sup>a</sup> .....2–11  
 pH Range, Short-Term Cleaning (30 min.)<sup>b</sup> .....1–12  
 Maximum Feed Silt Density Index (SDI) .....SDI 5  
 Free Chlorine Tolerance<sup>c</sup> .....<0.1 ppm

<sup>a</sup> Maximum temperature for continuous operation above pH 10 is 95°F (35°C).

<sup>b</sup> Refer to Cleaning Guidelines in specification sheet 609-23010.

<sup>c</sup> Under certain conditions, the presence of free chlorine and other oxidizing agents will cause premature membrane failure. Since oxidation damage is not covered under warranty, FilmTec recommends removing residual free chlorine by pretreatment prior to membrane exposure. Please refer to technical bulletin 609-22010 for more information.



**COMPONENT**  
 Tested and Certified to  
 ANSI/NSF Standard 58

\*Trademark of The Dow Chemical Company

# FILMTEC Membranes

For more information about FILMTEC membranes,

call the Dow Liquid Separations business:

North America . . . . . 1-800-447-4369

Latin America . . . . . (+55) 11-5188-9277


Europe . . . . . (+32) 3-450-2240

Japan . . . . . (+81) 3-5460-2100


Australia . . . . . (+61) 2-9776-3226

<http://www.filmtec.com>

## Impact of Pressure on Permeate Flow (constant temperature, recovery)

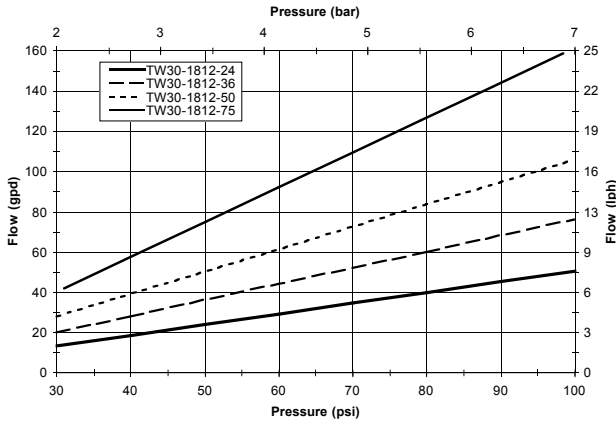

## Impact of Temperature on Permeate Flow (constant pressure, recovery)

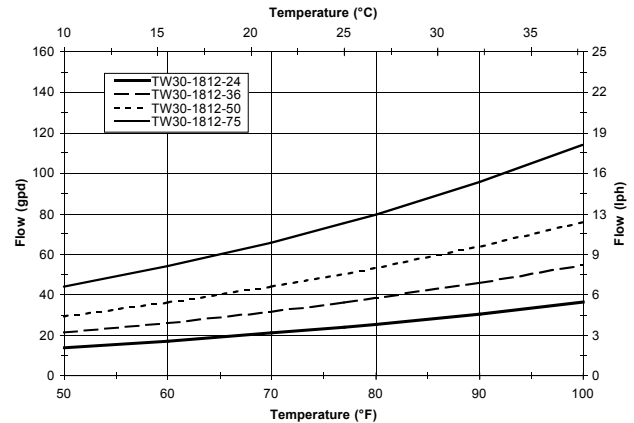

## General Information

1. The first full tank of permeate should be discarded. Do not use this initial permeate for drinking water or food preparation.
2. Keep elements moist at all times after initial wetting.
3. If operating limits and guidelines given in this bulletin are not strictly followed, the limited warranty will be null and void.
4. To prevent biological growth during prolonged system shutdowns, it is recommended that membrane elements be immersed in a preservative solution.
5. The membrane shows some resistance to short-term attack by chlorine (hypochlorite). Continuous exposure, however, may damage the membrane and should be avoided.
6. The customer is fully responsible for the effects of incompatible chemicals and lubricants on elements. Their use will void the element limited warranty.

**Notice:** The use of this product in and of itself does not necessarily guarantee the removal of cysts and pathogens from water. Effective cyst and pathogen reduction is dependent on the complete system design and on the operation and maintenance of the system.

**Notice:** No freedom from any patent owned by Seller or others is to be inferred. Because use conditions and applicable laws may differ from one location to another and may change with time, Customer is responsible for determining whether products and the information in this document are appropriate for Customer's use and for ensuring that Customer's workplace and disposal practices are in compliance with applicable laws and other governmental enactments. Seller assumes no obligation or liability for the information in this document. **NO WARRANTIES ARE GIVEN; ALL IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE ARE EXPRESSLY EXCLUDED.**

Published July 2002.

